



Download from  
**Dreamstime.com**


This watermarked comp image is for previewing purposes only.



ID 2468711

© Milan Surkala | Dreamstime.com

[Tia Eia 603 Pdf 38](#)

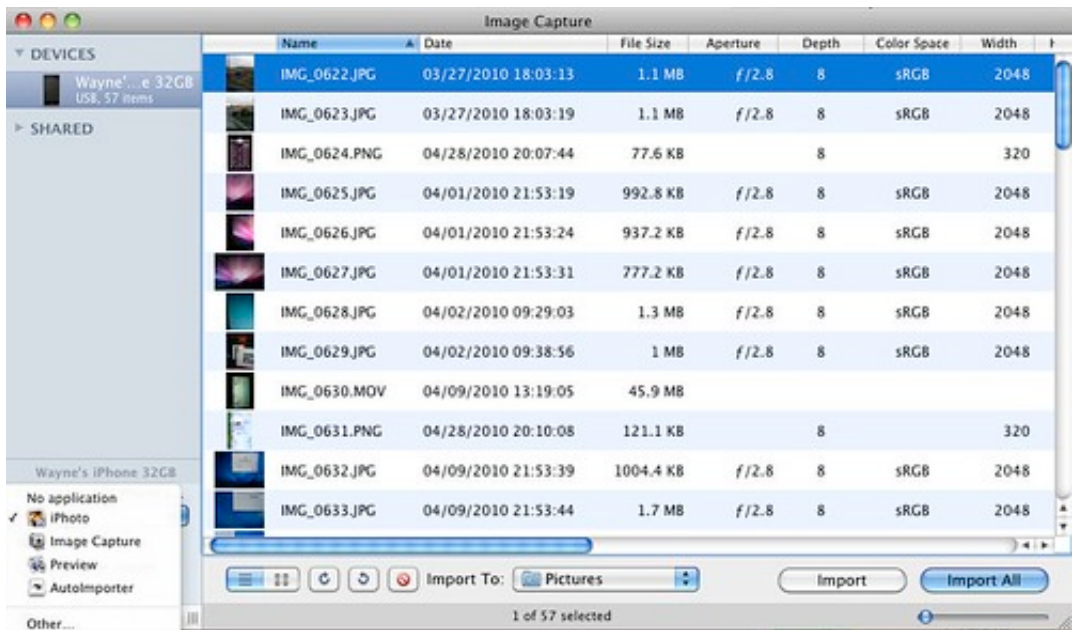

[Tia Eia 603 Pdf 38](#)



Download from  
**Dreamstime.com**

This watermarked comp image is for previewing purposes only.

ID 2468711

© Milan Surkala | Dreamstime.com

---

MEASURED IN ACCORDANCE WITH TIA/EIA-603 STANDARDS. RF Power Output: 1W to 50W ... (Oven control with option T38). Audio Response: Flat within ...

Also Includes: Owner's Manual. © 2020 BearCom. ... 38 MHz. 40 MHz. Dimensions (W x H x D), Projections not Included. Radio only. 54 x 113 x ... Measurements made per TIA/EIA 603 and specifications shown are typical. Specifications are ... (38 MHz) coverage in one radio model. HANDHELD ELEGANCE ... TRANSMITTER (Measurements made per TIA/EIA-603). RF Power Output. High. 5 W. 5 W.

16. 59mm x 127mm x 38mm. 225g. 1300mAh. MIL STD 810 C/D/E and TIA/EIA 603. Withstands rain testing per MIL STD 810 C/D/E and. TIA/EIA 603/1P54.

MIL STD 810-C/D/E and TIA/EIA 603. Dust and Humidity ... -38 dB @ 20 kHz. -40 dB @ 25 kHz ... five years of hard use in real life, EIA RS-316B in Shock .... (256 chips from the family of S(2) codes) or long (38 400 chips equal to one frame length ... 1999-10 [https://www.atis.org/atis/docstore/do·c\\_display.asp?ID=603](https://www.atis.org/atis/docstore/do·c_display.asp?ID=603). (2) ... TIA/EIA-95-B family of standards (i.e. the encoded voice data is transported .... Operational Bandwidth Maximum Frequency Separation, MHz. 38. Frequency Stability ... Audio Response (per TIA/EIA 603) ... Sensitivity, EIA 12 dB Sinad, dBm.

ST/PC connectors fitted. > Ø 3 x 6 mm outer diameter. > TIA/EIA-568B.3 & Bellcore GR-409 compliant. HIGHLIGHTS. > Low smoke & halogen free outer jacket.. 38. Measuring Tx Conducted Carrier Output Power Rating. 39. To measure output power. 39 ... Refer to TIA Standard 603-E, section 2.2.1, for more information.. RECEIVER (Measurements made per TIA/EIA-603). Frequency Range ... Wide/Narrow. 16K0F3E/11K0F3E. Type 1. 38MHz. 40MHz. FM Noise. Type 2. -. 42MHz.. VHF/UHF (TIA/EIA 102 and 603a) ... 12.5kHz channel. -43dB. -38dB. -40dB. -33dB. Conducted emissions (typical). -85dBc ... 25/30kHz channel (TIA/EIA 603a).. 4-1/4" x 2-5/16" x 1-1/2" (108 x 59 x 38 mm). (with battery). Weight (with ... Measurement procedures made per ANSI/TIA/EIA-603. Specifications are subject to .... Manual processes reduced to merely packing ... Phone: +603 7885 8724 ... 38. Fibre-optic universal bundle core cables. HELUCOM® pact. A/I-DQ(ZN)BH. Eca. 39 ... Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 5e.. Diabetes Care Volume 38, Supplement 1, January 2015. S1. INTR. OD. UCT ... JAMA 2009;301:603–618. 32. Feifer C ... Diabetes Care 2010;33:562–568. 6. Ziemer DC ... tia compared with rates in those with ... [prof/heart/hbp/hbp\\_ped.pdf](http://prof/heart/hbp/hbp_ped.pdf).. 38MHz. 70MHz. Dimensions (W x H x D), Projections not included. Radio Only ... 500 mW / 8 Ω. TRANSMITTER (Measurements made per TIA/EIA-603). 0273d78141